Z80®-CPU
Z80A-CPU

16.00 PLASTIC.
25.60 CERAMIC

Product Specification

MARCH 1978

A - 26.72
- 37.47 CERAMIC.

The Zilog Z80 product line is a complete set of microcomputer components, development systems and support software. The Z80 microcomputer component set includes all of the circuits necessary to build high-performance microcomputer systems with virtually no other logic and a minimum number of low cost standard memory elements.

The Z80 and Z80A CPU's are third generation single chip microprocessors with unrivaled computational power. This increased computational power results in higher system through-put and more efficient memory utilization when compared to second generation microprocessors. In addition, the Z80 and Z80A CPU's are very easy to implement into a system because of their single voltage requirement plus all output signals are fully decoded and timed to control standard memory or peripheral circuits. The circuit is implemented using an N-channel, ion implanted, silicon gate MOS process.

Figure 1 is a block diagram of the CPU, Figure 2 details the internal register configuration which contains 208 bits of Read/Write memory that are accessible to the programmer. The registers include two sets of six general purpose registers that may be used individually as 8-bit registers or as 16-bit register pairs. There are also two sets of accumulator and flag registers. The programmer has access to either set of main or alternate registers through a group of exchange instructions. This alternate set allows foreground/background mode of operation or may be reserved for very fast Interrupt response. Each CPU also contains a 16-bit stack pointer which permits simple implementation of multiple level interrupts, unlimited subroutine nesting and simplification of many types of data handling.

The two 16-bit index registers allow tabular data manipulation and easy implementation of relocatable code. The Refresh register provides for automatic, totally transparent refresh of external dynamic memories. The I register is used in a powerful interrupt response mode to form the upper 8 bits of a pointer to a interrupt service address table, while the interrupting device supplies the lower 8 bits of the pointer. An indirect call is then made to this service address.

FEATURES

- Single chip, N-channel Silicon Gate CPU.
- 158 instructions–includes all 78 of the 8080A instructions with total software compatibility. New instructions include 4-, 8- and 16-bit operations with more useful addressing modes such as indexed, bit and relative.
- 17 internal registers.
- Three modes of fast interrupt response plus a non-maskable interrupt.
- Directly interfaces standard speed static or dynamic memories with virtually no external logic.
- 1.0 μs instruction execution speed.
- Single 5 VDC supply and single-phase 5 volt Clock.
- Out-performs any other single chip microcomputer in 4-, 8-, or 16-bit applications.
- All pins TTL Compatible
- Built-in dynamic RAM refresh circuitry.

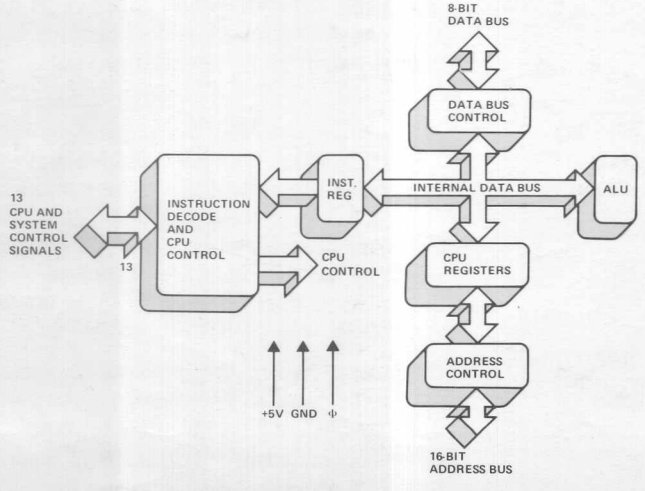

Z80, Z80A CPU BLOCK DIAGRAM

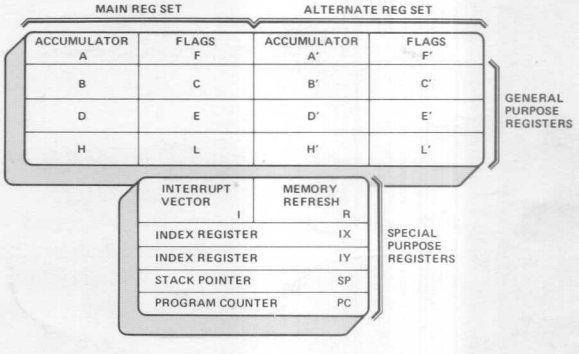

Z80, Z80A CPU REGISTERS

Z80, Z80A-CPU Pin Description

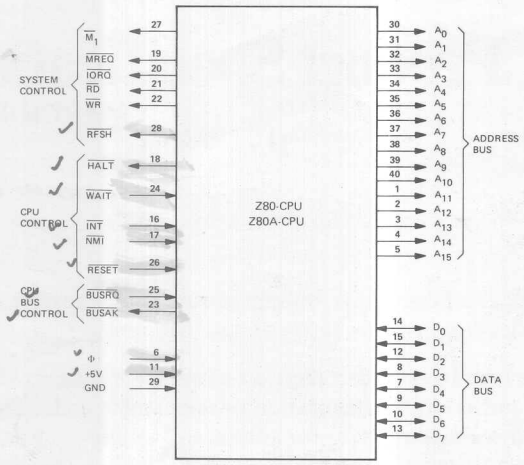

Z80, Z80A CPU PIN CONFIGURATION

A_0-A_{15} (Address Bus)
Tri-state output, active high. A_0-A_{15} constitute a 16-bit address bus. The address bus provides the address for memory (up to 64K bytes) data exchanges and for I/O device data exchanges.

D_0-D_7 (Data Bus)
Tri-state input/output, active high. D_0-D_7 constitute an 8-bit bidirectional data bus. The data bus is used for data exchanges with memory and I/O devices.

$\overline{M_1}$ (Machine Cycle one)
Output, active low. $\overline{M_1}$ indicates that the current machine cycle is the OP code fetch cycle of an instruction execution.

$\overline{MREQ}$ (Memory Request)
Tri-state output, active low. The memory request signal indicates that the address bus holds a valid address for a memory read or memory write operation.

$\overline{IORQ}$ (Input/ Output Request)
Tri-state output, active low. The $\overline{IORQ}$ signal indicates that the lower half of the address bus holds a valid I/O address for a I/O read or write operation. An $\overline{IORQ}$ signal is also generated when an interrupt is being acknowledged to indicate that an interrupt response vector can be placed on the data bus.

$\overline{RD}$ (Memory Read)
Tri-state output, active low. $\overline{RD}$ indicates that the CPU wants to read data from memory or an I/O device. The addressed I/O device or memory should use this signal to gate data onto the CPU data bus.

$\overline{WR}$ (Memory Write)
Tri-state output, active low. $\overline{WR}$ indicates that the CPU data bus holds valid data to be stored in the addressed memory or I/O device.

$\overline{RFSH}$ (Refresh)
Output, active low. $\overline{RFSH}$ indicates that the lower 7 bits of the address bus contain a refresh address for dynamic memories and the current $\overline{MREQ}$ signal should be used to do a refresh read to all dynamic memories.

$\overline{HALT}$ (Halt state)
Output, active low. $\overline{HALT}$ indicates that the CPU has executed a HALT software instruction and is awaiting either a non-maskable or a maskable interrupt (with the mask enabled) before operation can resume. While halted, the CPU executes NOP's to maintain memory refresh activity.

$\overline{WAIT}$ (Wait)
Input, active low. $\overline{WAIT}$ indicates to the Z-80 CPU that the addressed memory or I/O devices are not ready for a data transfer. The CPU continues to enter wait states for as long as this signal is active.

$\overline{INT}$ (Interrupt Request)
Input, active low. The Interrupt Request signal is generated by I/O devices. A request will be honored at the end of the current instruction if the internal software controlled interrupt enable flip-flop (IFF) is enabled.

$\overline{NMI}$ (Non Maskable Interrupt)
Input, active low. The non-maskable nterrupt request line has a higher priority than $\overline{INT}$ and is always recognized at the end of the current instruction, independent of the status of the interrupt enable flip-flop. $\overline{NMI}$ automatically forces the Z-80 CPU to restart to location 0066_H.

$\overline{RESET}$
Input, active low. $\overline{RESET}$ initializes the CPU as follows: reset interrupt enable flip-flop, clear PC and registers I and R and set interrupt to 8080A mode. During reset time, the address and data bus go to a high impedance state and all control output signals go to the inactive state.

$\overline{BUSRQ}$ (Bus Request)
Input, active low. The bus request signal has a higher priority than $\overline{NMI}$ and is always recognized at the end of the current machine cycle and is used to request the CPU address bus, data bus and tri-state output control signals to go to a high impedance state so that other devices can control these busses.

$\overline{BUSAK}$ (Bus Acknowledge)
Output, active low. Bus acknowledge is used to indicate to the requesting device that the CPU address bus, data bus and tri-state control bus signals have been set to their high impedance state and the external device can now control these signals.

Timing Waveforms

INSTRUCTION OP CODE FETCH

The program counter content (PC) is placed on the address bus immediately at the start of the cycle. One half clock time later $\overline{MREQ}$ goes active. The falling edge of $\overline{MREQ}$ can be used directly as a chip enable to dynamic memories. $\overline{RD}$ when active indicates that the memory data should be enabled onto the CPU data bus. The CPU samples data with the rising edge of the clock state T_3. Clock states T_3 and T_4 of a fetch cycle are used to refresh dynamic memories while the CPU is internally decoding and executing the instruction. The refresh control signal $\overline{RFSH}$ indicates that a refresh read of all dynamic memories should be accomplished.

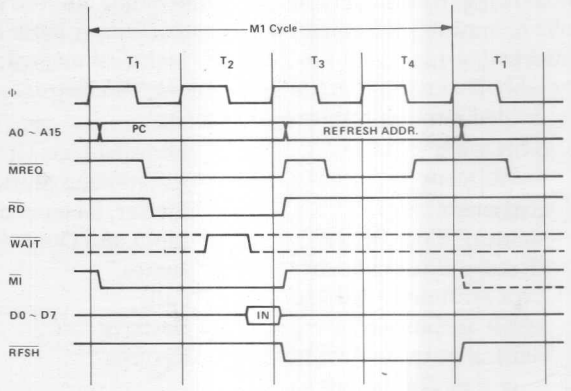

MEMORY READ OR WRITE CYCLES

Illustrated here is the timing of memory read or write cycles other than an OP code fetch (M_1 cycle). The $\overline{MREQ}$ and $\overline{RD}$ signals are used exactly as in the fetch cycle. In the case of a memory write cycle, the $\overline{MREQ}$ also becomes active when the address bus is stable so that it can be used directly as a chip enable for dynamic memories. The $\overline{WR}$ line is active when data on the data bus is stable so that it can be used directly as a R/W pulse to virtually any type of semiconductor memory.

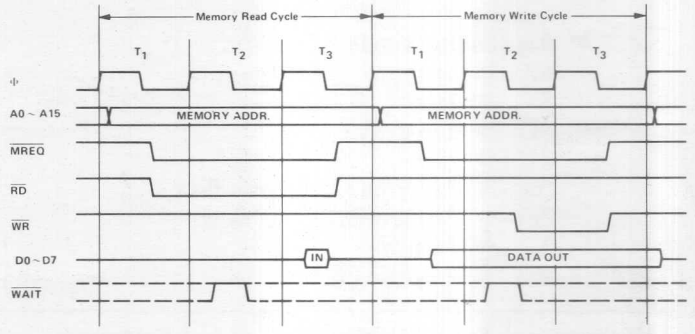

INPUT OR OUTPUT CYCLES

Illustrated here is the timing for an I/O read or I/O write operation. Notice that during I/O operations a single wait state is automatically inserted (Tw*). The reason for this is that during I/O operations this extra state allows sufficient time for an I/O port to decode its address and activate the $\overline{WAIT}$ line if a wait is required.

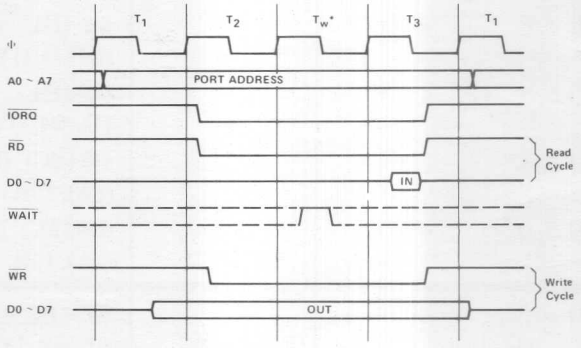

INTERRUPT REQUEST/ACKNOWLEDGE CYCLE

The interrupt signal is sampled by the CPU with the rising edge of the last clock at the end of any instruction. When an interrupt is accepted, a special M_1 cycle is generated. During this M_1 cycle, the $\overline{IORQ}$ signal becomes active (instead of $\overline{MREQ}$) to indicate that the interrupting device can place an 8-bit vector on the data bus. Two wait states (Tw*) are automatically added to this cycle so that a ripple priority interrupt scheme, such as the one used in the Z80 peripheral controllers, can be easily implemented.

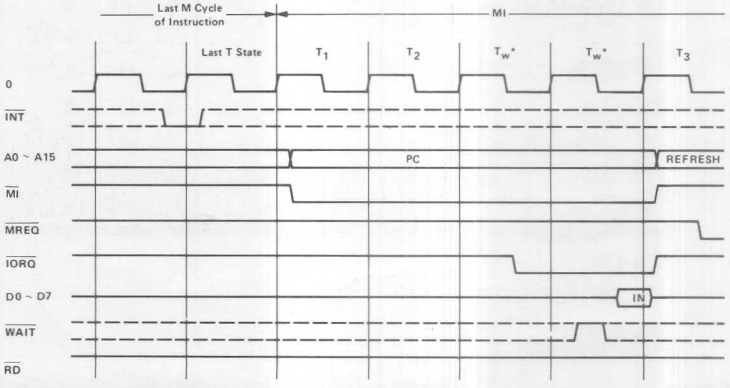

set showing the assembly language mnemonic and the symbolic operation performed by the instruction. A more detailed listing appears in the Z80-CPU technical manual, and assembly language programming manual. The instructions are divided into the following categories:

8-bit loads	Miscellaneous Group
16-bit loads	Rotates and Shifts
Exchanges	Bit Set, Reset and Test
Memory Block Moves	Input and Output
Memory Block Searches	Jumps
8-bit arithmetic and logic	Calls
16-bit arithmetic	Restarts
General purpose Accumulator & Flag Operations	Returns

In the table the following terminology is used.

b ≡ a bit number in any 8-bit register or memory location

cc ≡ flag condition code
- NZ ≡ non zero
- Z ≡ zero
- NC ≡ non carry
- C ≡ carry
- PO ≡ Parity odd or no over flow
- PE ≡ Parity even or over flow
- P ≡ Positive
- M ≡ Negative (minus)

dd ≡ any 16-bit destination register or memory location

e ≡ 8-bit signed 2's complement displacement used in relative jumps and indexed addressing

L ≡ 8 special call locations in page zero. In decimal notation these are 0, 8, 16, 24, 32, 40, 48 and 56

n ≡ any 8-bit binary number

nn ≡ any 16-bit binary number

r ≡ any 8-bit general purpose register (A, B, C, D, E, H, or L)

s ≡ any 8-bit source register or memory location

s_b ≡ a bit in a specific 8-bit register or memory location

ss ≡ any 16-bit source register or memory location

subscript "L" ≡ the low order 8 bits of a 16-bit register

subscript "H" ≡ the high order 8 bits of a 16-bit register

( ) ≡ the contents within the ( ) are to be used as a pointer to a memory location or I/O port number

8-bit registers are A, B, C, D, E, H, L, I and R

16-bit register pairs are AF, BC, DE and HL

16-bit registers are SP, PC, IX and IY

Addressing Modes implemented include combinations of the following:

Immediate	Indexed
Immediate extended	Register
Modified Page Zero	Implied
Relative	Register Indirect
Extended	Bit

	Mnemonic	Symbolic Operation	Comments
8-BIT LOADS	LD r, s	r ← s	s ≡ r, n, (HL), (IX+e), (IY+e)
	LD d, r	d ← r	d ≡ (HL), r (IX+e), (IY+e)
	LD d, n	d ← n	d ≡ (HL), (IX+e), (IY+e)
	LD A, s	A ← s	s ≡ (BC), (DE), (nn), I, R
	LD d, A	d ← A	d ≡ (BC), (DE), (nn), I, R
16-BIT LOADS	LD dd, nn	dd ← nn	dd ≡ BC, DE, HL, SP, IX, IY
	LD dd, (nn)	dd ← (nn)	dd ≡ BC, DE, HL, SP, IX, IY
	LD (nn), ss	(nn) ← ss	ss ≡ BC, DE, HL, SP, IX, IY
	LD SP, ss	SP ← ss	ss = HL, IX, IY
	PUSH ss	$(SP-1) \leftarrow ss_H$; $(SP-2) \leftarrow ss_L$	ss = BC, DE, HL, AF, IX, IY
	POP dd	$dd_L \leftarrow (SP)$; $dd_H \leftarrow (SP+1)$	dd = BC, DE, HL, AF, IX, IY
EXCHANGES	EX DE, HL	DE ↔ HL	
	EX AF, AF'	AF ↔ AF'	
	EXX	$\begin{pmatrix} BC \\ DE \\ HL \end{pmatrix} \leftrightarrow \begin{pmatrix} BC' \\ DE' \\ HL' \end{pmatrix}$	
	EX (SP), ss	$(SP) \leftrightarrow ss_L$, $(SP+1) \leftrightarrow ss_H$	ss ≡ HL, IX, IY

	Mnemonic	Symbolic Operation	Comments
MEMORY BLOCK MOVES	LDI	(DE) ← (HL), DE ← DE+1 HL ← HL+1, BC ← BC-1	
	LDIR	(DE) ← (HL), DE ← DE+1 HL ← HL+1, BC ← BC-1 Repeat until BC = 0	
	LDD	(DE) ← (HL), DE ← DE-1 HL ← HL-1, BC ← BC-1	
	LDDR	(DE) ← (HL), DE ← DE-1 HL ← HL-1, BC ← BC-1 Repeat until BC = 0	
MEMORY BLOCK SEARCHES	CPI	A-(HL), HL ← HL+1 BC ← BC-1	
	CPIR	A-(HL), HL ← HL+1 BC ← BC-1, Repeat until BC = 0 or A = (HL)	A-(HL) sets the flags only. A is not affected
	CPD	A-(HL), HL ← HL-1 BC ← BC-1	
	CPDR	A-(HL), HL ← HL-1 BC ← BC-1, Repeat until BC= 0 or A = (HL)	
8-BIT ALU	ADD s	A ← A + s	
	ADC s	A ← A + s + CY	CY is the carry flag
	SUB s	A ← A - s	
	SBC s	A ← A - s - CY	s ≡ r, n, (HL) (IX+e), (IY+e)
	AND s	A ← A ∧ s	
	OR s	A ← A ∨ s	
	XOR s	A ← A ⊕ s	

	Mnemonic	Symbolic Operation	Comments
8-BIT ALU	CP s	A - s	s = r, n (HL) (IX+e), (IY+e)
	INC d	d ← d + 1	d = r, (HL) (IX+e), (IY+e)
	DEC d	d ← d - 1	
16-BIT ARITHMETIC	ADD HL, ss	HL ← HL + ss	ss ≡ BC, DE HL, SP
	ADC HL, ss	HL ← HL + ss + CY	
	SBC HL, ss	HL ← HL - ss - CY	
	ADD IX, ss	IX ← IX + ss	ss ≡ BC, DE, IX, SP
	ADD IY, ss	IY ← IY + ss	ss ≡ BC, DE, IY, SP
	INC dd	dd ← dd + 1	dd ≡ BC, DE, HL, SP, IX, IY
	DEC dd	dd ← dd - 1	dd ≡ BC, DE, HL, SP, IX, IY
GP ACC. & FLAG	DAA	Converts A contents into packed BCD following add or subtract.	Operands must be in packed BCD format
	CPL	$A \leftarrow \overline{A}$	
	NEG	A ← 00 – A	
	CCF	$CY \leftarrow \overline{CY}$	
	SCF	CY ← 1	
MISCELLANEOUS	NOP	No operation	
	HALT	Halt CPU	
	DI	Disable Interrupts	
	EI	Enable Interrupts	
	IM 0	Set interrupt mode 0	8080A mode
	IM 1	Set interrupt mode 1	Call to 0038_H
	IM 2	Set interrupt mode 2	Indirect Call
ROTATES AND SHIFTS	RLC s		
	RL s		
	RRC s		
	RR s		
	SLA s		s ≡ r, (HL) (IX+e), (IY+e)
	SRA s		
	SRL s		
	RLD		
	RRD		

	Mnemonic	Symbolic Operation	Comments
BIT S, R, & T	BIT b, s	$Z \leftarrow \overline{s_b}$	Z is zero flag
	SET b, s	$s_b \leftarrow 1$	s ≡ r, (HL) (IX+e), (IY+e)
	RES b, s	$s_b \leftarrow 0$	
INPUT AND OUTPUT	IN A, (n)	A ← (n)	
	IN r, (C)	r ← (C)	Set flags
	INI	(HL) ← (C), HL ← HL + 1 B ← B - 1	
	INIR	(HL) ← (C), HL ← HL + 1 B ← B - 1 Repeat until B = 0	
	IND	(HL) ← (C), HL ← HL - 1 B ← B - 1	
	INDR	(HL) ← (C), HL ← HL - 1 B ← B - 1 Repeat until B = 0	
	OUT(n), A	(n) ← A	
	OUT(C), r	(C) ← r	
	OUTI	(C) ← (HL), HL ← HL + 1 B ← B - 1	
	OTIR	(C) ← (HL), HL ← HL + 1 B ← B - 1 Repeat until B = 0	
	OUTD	(C) ← (HL), HL ← HL - 1 B ← B - 1	
	OTDR	(C) ← (HL), HL ← HL - 1 B ← B - 1 Repeat until B = 0	
JUMPS	JP nn	PC ← nn	cc ≡ NZ PO, Z PE, NC P, C M
	JP cc, nn	If condition cc is true PC ← nn, else continue	
	JR e	PC ← PC + e	
	JR kk, e	If condition kk is true PC ← PC + e, else continue	kk ≡ NZ NC, Z C
	JP (ss)	PC ← ss	ss = HL, IX, IY
	DJNZ e	B ← B - 1, if B = 0 continue, else PC ← PC + e	
CALLS	CALL nn	$(SP-1) \leftarrow PC_H$ $(SP-2) \leftarrow PC_L$, PC ← nn	cc ≡ NZ PO, Z PE, NC P, C M
	CALL cc, nn	If condition cc is false continue, else same as CALL nn	
RESTARTS	RST L	$(SP-1) \leftarrow PC_H$ $(SP-2) \leftarrow PC_L$, $PC_H \leftarrow 0$ $PC_L \leftarrow L$	
RETURNS	RET	$PC_L \leftarrow (SP)$, $PC_H \leftarrow (SP+1)$	cc ≡ NZ PO, Z PE, NC P, C M
	RET cc	If condition cc is false continue, else same as RET	
	RETI	Return from interrupt, same as RET	
	RETN	Return from non-maskable interrupt	

T_A = O°C to 70°C, Vcc = +5V ± 5%, Unless Otherwise Noted.

Signal	Symbol	Parameter	Min	Max	Unit	Test Condition
Φ	t_c	Clock Period	.4	[12]	μsec	
	$t_{w(\Phi H)}$	Clock Pulse Width, Clock High	180	[E]	nsec	
	$t_{w(\Phi L)}$	Clock Pulse Width, Clock Low	180	2000	nsec	
	$t_{r,f}$	Clock Rise and Fall Time		30	nsec	
A_{0-15}	$t_{D(AD)}$	Address Output Delay		145	nsec	C_L = 50pF
	$t_{F(AD)}$	Delay to Float		110	nsec	
	t_{acm}	Address Stable Prior to $\overline{MREQ}$ (Memory Cycle)	[1]		nsec	
	t_{aci}	Address Stable Prior to $\overline{IORQ}$, $\overline{RD}$ or $\overline{WR}$ (I/O Cycle)	[2]		nsec	
	t_{ca}	Address Stable from $\overline{RD}$, $\overline{WR}$, $\overline{IORQ}$ or $\overline{MREQ}$	[3]		nsec	
	t_{caf}	Address Stable From $\overline{RD}$ or $\overline{WR}$ During Float	[4]		nsec	
D_{0-7}	$t_{D(D)}$	Data Output Delay		230	nsec	C_L = 50pF
	$t_{F(D)}$	Delay to Float During Write Cycle		90	nsec	
	$t_{S\Phi(D)}$	Data Setup Time to Rising Edge of Clock During M1 Cycle	50		nsec	
	$t_{S\overline{\Phi}(D)}$	Data Setup Time to Falling Edge of Clock During M2 to M5	60		nsec	
	t_{dcm}	Data Stable Prior to $\overline{WR}$ (Memory Cycle)	[5]		nsec	
	t_{dci}	Data Stable Prior to $\overline{WR}$ (I/O Cycle)	[6]		nsec	
	t_{cdf}	Data Stable From $\overline{WR}$	[7]			
	t_H	Any Hold Time for Setup Time	0		nsec	
$\overline{MREQ}$	$t_{DL\overline{\Phi}(MR)}$	$\overline{MREQ}$ Delay From Falling Edge of Clock, $\overline{MREQ}$ Low		100	nsec	C_L = 50pF
	$t_{DH\Phi(MR)}$	$\overline{MREQ}$ Delay From Rising Edge of Clock, $\overline{MREQ}$ High		100	nsec	
	$t_{DH\overline{\Phi}(MR)}$	$\overline{MREQ}$ Delay From Falling Edge of Clock, $\overline{MREQ}$ High		100	nsec	
	$t_{w(MRL)}$	Pulse Width, $\overline{MREQ}$ Low	[8]		nsec	
	$t_{w(MRH)}$	Pulse Width, $\overline{MREQ}$ High	[9]		nsec	
$\overline{IORQ}$	$t_{DL\Phi(IR)}$	$\overline{IORQ}$ Delay From Rising Edge of Clock, $\overline{IORQ}$ Low		90	nsec	C_L = 50pF
	$t_{DL\overline{\Phi}(IR)}$	$\overline{IORQ}$ Delay From Falling Edge of Clock, $\overline{IORQ}$ Low		110	nsec	
	$t_{DH\Phi(IR)}$	$\overline{IORQ}$ Delay From Rising Edge of Clock, $\overline{IORQ}$ High		100	nsec	
	$t_{DH\overline{\Phi}(IR)}$	$\overline{IORQ}$ Delay From Falling Edge of Clock, $\overline{IORQ}$ High		110	nsec	
$\overline{RD}$	$t_{DL\Phi(RD)}$	$\overline{RD}$ Delay From Rising Edge of Clock, $\overline{RD}$ Low		100	nsec	C_L = 50pF
	$t_{DL\overline{\Phi}(RD)}$	$\overline{RD}$ Delay From Falling Edge of Clock, $\overline{RD}$ Low		130	nsec	
	$t_{DH\Phi(RD)}$	$\overline{RD}$ Delay From Rising Edge of Clock, $\overline{RD}$ High		100	nsec	
	$t_{DH\overline{\Phi}(RD)}$	$\overline{RD}$ Delay From Falling Edge of Clock, $\overline{RD}$ High		110	nsec	
$\overline{WR}$	$t_{DL\Phi(WR)}$	$\overline{WR}$ Delay From Rising Edge of Clock, $\overline{WR}$ Low		80	nsec	C_L = 50pF
	$t_{DL\overline{\Phi}(WR)}$	$\overline{WR}$ Delay From Falling Edge of Clock, $\overline{WR}$ Low		90	nsec	
	$t_{DH\overline{\Phi}(WR)}$	$\overline{WR}$ Delay From Falling Edge of Clock, $\overline{WR}$ High		100	nsec	
	$t_{w(\overline{WR}L)}$	Pulse Width, $\overline{WR}$ Low	[10]		nsec	
$\overline{M1}$	$t_{DL(M1)}$	$\overline{M1}$ Delay From Rising Edge of Clock, $\overline{M1}$ Low		130	nsec	C_L = 50pF
	$t_{DH(M1)}$	$\overline{M1}$ Delay From Rising Edge of Clock, $\overline{M1}$ High		130	nsec	
$\overline{RFSH}$	$t_{DL(RF)}$	$\overline{RFSH}$ Delay From Rising Edge of Clock, $\overline{RFSH}$ Low		180	nsec	C_L = 50pF
	$t_{DH(RF)}$	$\overline{RFSH}$ Delay From Rising Edge of Clock, $\overline{RFSH}$ High		150	nsec	
$\overline{WAIT}$	$t_{s(WT)}$	$\overline{WAIT}$ Setup Time to Falling Edge of Clock	70		nsec	
$\overline{HALT}$	$t_{D(HT)}$	$\overline{HALT}$ Delay Time From Falling Edge of Clock		300	nsec	C_L = 50pF
$\overline{INT}$	$t_{s(IT)}$	$\overline{INT}$ Setup Time to Rising Edge of Clock	80		nsec	
$\overline{NMI}$	$t_{w(\overline{NML})}$	Pulse Width, $\overline{NMI}$ Low	80		nsec	
$\overline{BUSRQ}$	$t_{s(BQ)}$	$\overline{BUSRQ}$ Setup Time to Rising Edge of Clock	80		nsec	
$\overline{BUSAK}$	$t_{DL(BA)}$	$\overline{BUSAK}$ Delay From Rising Edge of Clock, $\overline{BUSAK}$ Low		120	nsec	C_L = 50pF
	$t_{DH(BA)}$	$\overline{BUSAK}$ Delay From Falling Edge of Clock, $\overline{BUSAK}$ High		110	nsec	
$\overline{RESET}$	$t_{s(RS)}$	$\overline{RESET}$ Setup Time to Rising Edge of Clock	90		nsec	
	$t_{F(C)}$	Delay to Float ($\overline{MREQ}$, $\overline{IORQ}$, $\overline{RD}$ and $\overline{WR}$)		100	nsec	
	t_{mr}	$\overline{M1}$ Stable Prior to $\overline{IORQ}$ (Interrupt Ack.)	[11]		nsec	

[12] $t_c = t_{w(\Phi H)} + t_{w(\Phi L)} + t_r + t_f$

[1] $t_{acm} = t_{w(\Phi H)} + t_f - 75$

[2] $t_{aci} = t_c - 80$

[3] $t_{ca} = t_{w(\Phi L)} + t_r - 40$

[4] $t_{caf} = t_{w(\Phi L)} + t_r - 60$

[5] $t_{dcm} = t_c - 210$

[6] $t_{dci} = t_{w(\Phi L)} + t_r - 210$

[7] $t_{cdf} = t_{w(\Phi L)} + t_r - 80$

[8] $t_{w(MRL)} = t_c - 40$

[9] $t_{w(MRH)} = t_{w(\Phi H)} + t_f - 30$

[10] $t_{w(\overline{WR}L)} = t_c - 40$

[11] $t_{mr} = 2t_c + t_{w(\Phi H)} + t_f - 80$

NOTES:

A. Data should be enabled onto the CPU data bus when $\overline{RD}$ is active. During interrupt acknowledge data should be enabled when $\overline{M1}$ and $\overline{IORQ}$ are both active.

B. All control signals are internally synchronized, so they may be totally asynchronous with respect to the clock.

C. The $\overline{RESET}$ signal must be active for a minimum of 3 clock cycles.

D. Output Delay vs. Loaded Capacitance

TA = 70°C Vcc = +5V ±5%

Add 10nsec delay for each 50pf increase in load up to a maximum of 200pf for the data bus & 100pf for address & control lines

E. Although static by design, testing guarantees $t_{w(\Phi H)}$ of 200 μsec maximum

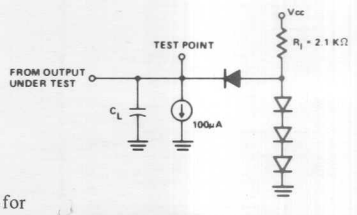

Load circuit for Output

A.C. Timing Diagram

Timing measurements are made at the following voltages, unless otherwise specified:

	"1"	"0"
CLOCK	V_{cc} -.6V	.45V
OUTPUT	2.0 V	.8 V
INPUT	2.0 V	.8 V
FLOAT	Δ V	± 0.5 V

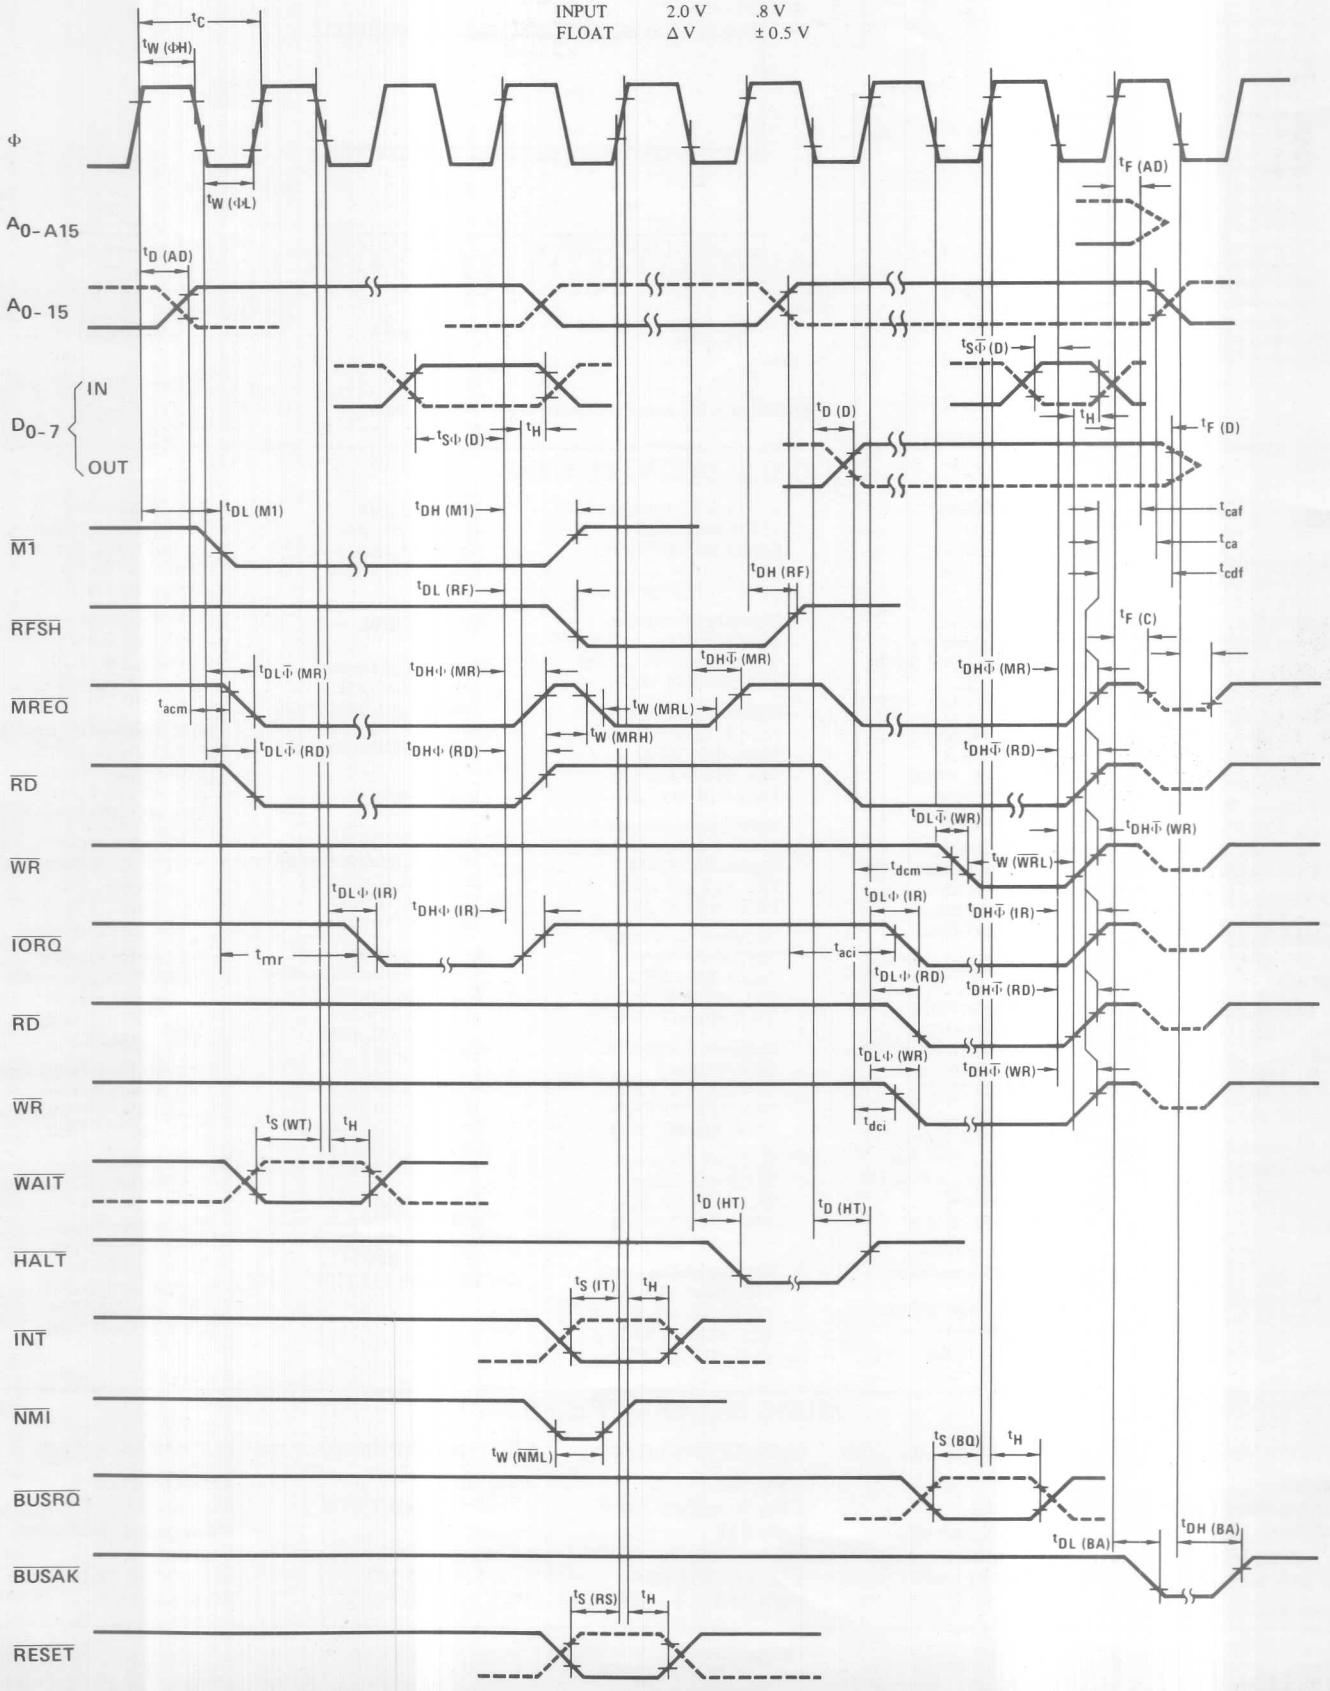

Absolute Maximum Ratings

Temperature Under Bias	Specified operating range.
Storage Temperature	-65°C to +150°C
Voltage On Any Pin with Respect to Ground	-0.3V to +7V
Power Dissipation	1.5W

*Comment

Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other condition above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note: For Z80-CPU all AC and DC characteristics remain the same for the military grade parts except I_{cc}.

I_{cc} = 200 mA

Z80-CPU D.C. Characteristics

T_A = 0°C to 70°C, V_{cc} = 5V ± 5% unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Condition
V_{ILC}	Clock Input Low Voltage	-0.3		0.45	V	
V_{IHC}	Clock Input High Voltage	V_{cc} -.6		V_{cc}+.3	V	
V_{IL}	Input Low Voltage	-0.3		0.8	V	
V_{IH}	Input High Voltage	2.0		V_{cc}	V	
V_{OL}	Output Low Voltage			0.4	V	I_{OL}=1.8mA
V_{OH}	Output High Voltage	2.4			V	I_{OH} = -250μA
I_{CC}	Power Supply Current			150	mA	
I_{LI}	Input Leakage Current			10	μA	V_{IN}=0 to V_{cc}
I_{LOH}	Tri-State Output Leakage Current in Float			10	μA	V_{OUT}=2.4 to V_{cc}
I_{LOL}	Tri-State Output Leakage Current in Float			-10	μA	V_{OUT}=0.4V
I_{LD}	Data Bus Leakage Current in Input Mode			±10	μA	$0 \leqslant V_{IN} \leqslant V_{cc}$

Z80A-CPU D.C. Characteristics

T_A = 0°C to 70°C, V_{cc} = 5V ± 5% unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Condition
V_{ILC}	Clock Input Low Voltage	-0.3		0.45	V	
V_{IHC}	Clock Input High Voltage	V_{cc} -.6		V_{cc}+.3	V	
V_{IL}	Input Low Voltage	-0.3		0.8	V	
V_{IH}	Input High Voltage	2.0		V_{cc}	V	
V_{OL}	Output Low Voltage			0.4	V	I_{OL}=1.8mA
V_{OH}	Output High Voltage	2.4			V	I_{OH} = -250μA
I_{CC}	Power Supply Current		90	200	mA	
I_{LI}	Input Leakage Current			10	μA	V_{IN}=0 to V_{cc}
I_{LOH}	Tri-State Output Leakage Current in Float			10	μA	V_{OUT}=2.4 to V_{cc}
I_{LOL}	Tri-State Output Leakage Current in Float			-10	μA	V_{OUT}=0.4V
I_{LD}	Data Bus Leakage Current in Input Mode			±10	μA	$0 \leqslant V_{IN} \leqslant V_{cc}$

Capacitance

T_A = 25°C, f = 1 MHz,
unmeasured pins returned to ground

Symbol	Parameter	Max.	Unit
C_{Φ}	Clock Capacitance	35	pF
C_{IN}	Input Capacitance	5	pF
C_{OUT}	Output Capacitance	10	pF

Z80-CPU Ordering Information

C – Ceramic
P – Plastic
S – Standard 5V ±5% 0° to 70°C
E – Extended 5V ±5% -40° to 85°C
M – Military 5V ±10% -55° to 125°C

Capacitance

T_A = 25°C, f = 1 MHz,
unmeasured pins returned to ground

Symbol	Parameter	Max.	Unit
C_{Φ}	Clock Capacitance	35	pF
C_{IN}	Input Capacitance	5	pF
C_{OUT}	Output Capacitance	10	pF

Z80A-CPU Ordering Information

C – Ceramic
P – Plastic
S – Standard 5V ±5% 0° to 70°C

T_A = 0°C to 70°C, Vcc = +5V ± 5%, Unless Otherwise Noted.

Signal	Symbol	Parameter	Min	Max	Unit	Test Condition
Φ	t_c	Clock Period	.25	[12]	μsec	
	t_w (ΦH)	Clock Pulse Width, Clock High	110	[E]	nsec	
	t_w (ΦL)	Clock Pulse Width, Clock Low	110	2000	nsec	
	$t_{r,f}$	Clock Rise and Fall Time		30	nsec	
A_{0-15}	$t_{D(AD)}$	Address Output Delay		110	nsec	C_L = 50pF
	$t_{F(AD)}$	Delay to Float		90	nsec	
	t_{acm}	Address Stable Prior to $\overline{MREQ}$ (Memory Cycle)	[1]		nsec	
	t_{aci}	Address Stable Prior to $\overline{IORQ}$, $\overline{RD}$ or $\overline{WR}$ (I/O Cycle)	[2]		nsec	
	t_{ca}	Address Stable from $\overline{RD}$, $\overline{WR}$, $\overline{IORQ}$ or $\overline{MREQ}$	[3]		nsec	
	t_{caf}	Address Stable From $\overline{RD}$ or $\overline{WR}$ During Float	[4]		nsec	
D_{0-7}	$t_{D(D)}$	Data Output Delay		150	nsec	C_L = 50pF
	$t_{F(D)}$	Delay to Float During Write Cycle		90	nsec	
	$t_{S\Phi(D)}$	Data Setup Time to Rising Edge of Clock During M1 Cycle	35		nsec	
	$t_{S\overline{\Phi}(D)}$	Data Setup Time to Falling Edge of Clock During M2 to M5	50		nsec	
	t_{dcm}	Data Stable Prior to $\overline{WR}$ (Memory Cycle)	[5]		nsec	
	t_{dci}	Data Stable Prior to $\overline{WR}$ (I/O Cycle)	[6]		nsec	
	t_{cdf}	Data Stable From $\overline{WR}$	[7]			
	t_H	Any Hold Time for Setup Time		0	nsec	
$\overline{MREQ}$	$t_{DL\overline{\Phi}(MR)}$	$\overline{MREQ}$ Delay From Falling Edge of Clock, $\overline{MREQ}$ Low		85	nsec	C_L = 50pF
	$t_{DH\Phi(MR)}$	$\overline{MREQ}$ Delay From Rising Edge of Clock, $\overline{MREQ}$ High		85	nsec	
	$t_{DH\overline{\Phi}(MR)}$	$\overline{MREQ}$ Delay From Falling Edge of Clock, $\overline{MREQ}$ High		85	nsec	
	t_w ($\overline{MRL}$)	Pulse Width, $\overline{MREQ}$ Low	[8]		nsec	
	t_w ($\overline{MRH}$)	Pulse Width, $\overline{MREQ}$ High	[9]		nsec	
$\overline{IORQ}$	$t_{DL\Phi(IR)}$	$\overline{IORQ}$ Delay From Rising Edge of Clock, $\overline{IORQ}$ Low		75	nsec	C_L = 50pF
	$t_{DL\overline{\Phi}(IR)}$*	$\overline{IORQ}$ Delay From Falling Edge of Clock, $\overline{IORQ}$ Low		85	nsec	
	$t_{DH\Phi(IR)}$	$\overline{IORQ}$ Delay From Rising Edge of Clock, $\overline{IORQ}$ High		85	nsec	
	$t_{DH\overline{\Phi}(IR)}$	$\overline{IORQ}$ Delay From Falling Edge of Clock, $\overline{IORQ}$ High		85	nsec	
$\overline{RD}$	$t_{DL\Phi(RD)}$	$\overline{RD}$ Delay From Rising Edge of Clock, $\overline{RD}$ Low		85	nsec	C_L = 50pF
	$t_{DL\overline{\Phi}(RD)}$	$\overline{RD}$ Delay From Falling Edge of Clock, $\overline{RD}$ Low		95	nsec	
	$t_{DH\Phi(RD)}$	$\overline{RD}$ Delay From Rising Edge of Clock, $\overline{RD}$ High		85	nsec	
	$t_{DH\overline{\Phi}(RD)}$	$\overline{RD}$ Delay From Falling Edge of Clock, $\overline{RD}$ High		85	nsec	
$\overline{WR}$	$t_{DL\Phi(WR)}$	$\overline{WR}$ Delay From Rising Edge of Clock, $\overline{WR}$ Low		65	nsec	C_L = 50pF
	$t_{DL\overline{\Phi}(WR)}$	$\overline{WR}$ Delay From Falling Edge of Clock, $\overline{WR}$ Low		80	nsec	
	$t_{DH\overline{\Phi}(WR)}$	$\overline{WR}$ Delay From Falling Edge of Clock, $\overline{WR}$ High		80	nsec	
	t_w ($\overline{WRL}$)	Pulse Width, $\overline{WR}$ Low	[10]		nsec	
$\overline{M1}$	$t_{DL(M1)}$	$\overline{M1}$ Delay From Rising Edge of Clock, $\overline{M1}$ Low		100	nsec	C_L = 50pF
	$t_{DH(M1)}$	$\overline{M1}$ Delay From Rising Edge of Clock, $\overline{M1}$ High		100	nsec	
$\overline{RFSH}$	$t_{DL(RF)}$	$\overline{RFSH}$ Delay From Rising Edge of Clock, $\overline{RFSH}$ Low		130	nsec	C_L = 50pF
	$t_{DH(RF)}$	$\overline{RFSH}$ Delay From Rising Edge of Clock, $\overline{RFSH}$ High		120	nsec	
$\overline{WAIT}$	$t_{s(WT)}$	$\overline{WAIT}$ Setup Time to Falling Edge of Clock	70		nsec	
$\overline{HALT}$	$t_{D(HT)}$	$\overline{HALT}$ Delay Time From Falling Edge of Clock		300	nsec	C_L = 50pF
$\overline{INT}$	$t_{s(IT)}$	$\overline{INT}$ Setup Time to Rising Edge of Clock	80		nsec	
$\overline{NMI}$	t_w ($\overline{NML}$)	Pulse Width, $\overline{NMI}$ Low	80		nsec	
$\overline{BUSRQ}$	$t_{s(BQ)}$	$\overline{BUSRQ}$ Setup Time to Rising Edge of Clock	50		nsec	
$\overline{BUSAK}$	$t_{DL(BA)}$	$\overline{BUSAK}$ Delay From Rising Edge of Clock, $\overline{BUSAK}$ Low		100	nsec	C_L = 50pF
	$t_{DH(BA)}$	$\overline{BUSAK}$ Delay From Falling Edge of Clock, $\overline{BUSAK}$ High		100	nsec	
$\overline{RESET}$	$t_{s(RS)}$	$\overline{RESET}$ Setup Time to Rising Edge of Clock	60		nsec	
	$t_{F(C)}$	Delay to Float ($\overline{MREQ}$, $\overline{IORQ}$, $\overline{RD}$ and $\overline{WR}$)		80	nsec	
	t_{mr}	M1 Stable Prior to IORQ (Interrupt Ack.)	[11]		nsec	

[12] $t_c = t_{w(\Phi H)} + t_{w(\Phi L)} + t_r + t_f$

[1] $t_{acm} = t_{w(\Phi H)} + t_f - 65$

[2] $t_{aci} = t_c - 70$

[3] $t_{ca} = t_{w(\Phi L)} + t_r - 50$

[4] $t_{caf} = t_{w(\Phi L)} + t_r - 45$

[5] $t_{dcm} = t_c - 170$

[6] $t_{dci} = t_{w(\Phi L)} + t_r - 170$

[7] $t_{cdf} = t_{w(\Phi L)} + t_r - 70$

[8] $t_w(\overline{MRL}) = t_c - 30$

[9] $t_{w(\overline{MRH})} = t_{w(\Phi H)} + t_f - 20$

[10] $t_{w(\overline{WRL})} = t_c - 30$

[11] $t_{mr} = 2t_c + t_{w(\Phi H)} + t_f - 65$

NOTES:

A. Data should be enabled onto the CPU data bus when $\overline{RD}$ is active. During interrupt acknowledge data should be enabled when $\overline{M1}$ and $\overline{IORQ}$ are both active.

B. All control signals are internally synchronized, so they may be totally asynchronous with respect to the clock.

C. The $\overline{RESET}$ signal must be active for a minimum of 3 clock cycles.

D. Output Delay vs. Loaded Capacitance
TA = 70°C Vcc = +5V ±5%
Add 10nsec delay for each 50pf increase in load up to maximum of 200pf for data bus and 100pf for address & control lines.

E. Although static by design, testing guarantees $t_{w(\Phi H)}$ of 200 μsec maximum

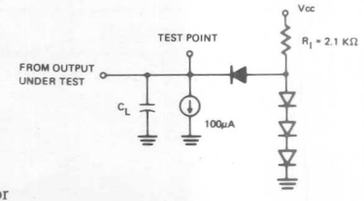

Load circuit for Output

Package Configuration

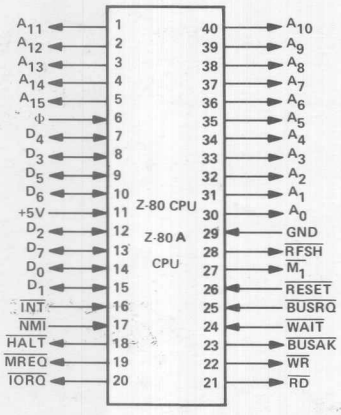

Package Outline

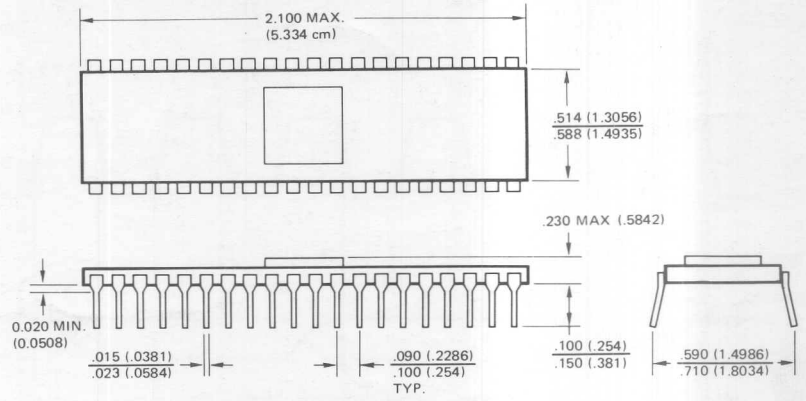

*Dimensions for metric system are in parentheses

ZILOG U.S. DISTRIBUTORS

EASTERN

Hallmark Electronics
4739 Commercial Drive
Huntsville, AL 35805
TEL 205 837 8700
TWX 810 726 2187

Hallmark Electronics
1302 West McNab Road
Fort Lauderdale, FL 33309
TEL 305 971 9280
TWX 510 956 9720

Hallmark Electronics
7233 Lake Ellenor Drive
Orlando, FL 32809
TEL 305 855 4020
TWX 810 850 0183

Hallmark Electronics
3355 Amberton Drive
Baltimore MD 21227
TEL 301 796 9300
TWX 710 862 1942

Hallmark Electronics
1208 Front Street
Building K
Raleigh, NC 27609
TEL 919 832 4465
TWX 510 928 1831

Hallmark Electronics
Pike Industrial Park
Huntington Valley, PA 19006
TEL 215 355 7300
TWX 510 667 1750

Summit
916 Main Street
Buffalo, NY 14202
TEL 716 884 3450

Wilshire Electronics
2554 State Street
Hamden, CT 06517
TEL 203 281 1166
TWX 800 922 1734

Wilshire Electronics
1855 New Highway
Farmingdale, LI, NY 11735
TEL 516 293 5775
TWX 212 895 8707

Wilshire Electronics
One Wilshire Road
Burlington, MA 01803
TEL 617 272 8200
TWX 710 332 6359

Wilshire Electronics
1111 Paulison Avenue
Clifton, NJ 07015
TEL 201 340 1900
TWX 710 989 7052

MIDWESTERN

Hallmark Electronics
180 Grossen Avenue
Elk Grove Village, IL 60076
TEL 312 437 8800
TWX 910 223 3645

Hallmark Electronics
11870 West 91st Street
Congleton Industrial Park
Shawnee Mission, KS 66214
TEL 913 888 4747
TWX 910 749 6620

Hallmark Electronics
9201 Penn Avenue South
Suite 10
Bloomington, MN 55435
TEL 612 884 9056
TWX 910 576 3187

Hallmark Electronics
13789 Rider Trail
Earth City, MO 63045
TEL 314 291 5350
TWX 910 760 0671

Hallmark Electronics
6969 Worthington Galena Road
Worthington, OH 43085
TEL 614 846 1882

Hallmark Electronics
4846 S. 83rd E. Avenue
Tulsa, OK 74145
TEL 918 835 8458
TWX 910 845 2290

Hallmark Electronics
3100–A Industrial Terrace
Austin, TX 78758
TEL 512 837 2841
TWX 910 874 2031

Hallmark Electronics
9333 Forest Lane
Dallas, TX 75231
TEL 214 234 7300
TWX 910 867 4721

Hallmark Electronics
8000 Westglen
Houston, TX 77063
TEL 713 781 6100
TWX 910 881 2711

Hallmark Electronics
237 South Curtis
West Allis, WI 53214
TEL 414 476 1270
TWX 910 262 3186

RM Electronics
4860 South Division
Kentwood, MI 49508
TEL 616 531 9300
TWX 810 273 8779

RM Electronics
47 Chestnut Lane
Westmont, Illinois 60559
TEL 312 323 9670

MOUNTAIN

Century Electronics
121 Elizabeth, NE
Albuquerque, NM 87123
TEL 505 292 2700
TWX 910 989 0625

WESTERN

Intermark Electronics
1802 E. Carnegie Avenue
Santa Ana, CA 92705
TEL 714 540 1322
TWX 910 595 1583

Intermark Electronics
4040 Sorrento Valley Blvd.
San Diego, CA 92121
TEL 714 279 5200
714 453 9005
TWX 910 335 1515

Intermark Electronics
1020 Stewart Drive
Sunnyvale, CA 94086
TEL 408 738 1111
TWX 910 339 9312

R.V. Weatherford Co.
6921 San Fernando Road
Glendale, CA 91201
TEL 213 849 3451
TWX 910 498 2223

R.V. Weatherford Co.
1550 Babbitt Avenue
Anaheim, CA 92805
TEL 714 634 9600
TWX 910 593 1334

R.V. Weatherford Co.
1095 East Third Street
Pomona, CA 91765
TEL 714 623 1261
TWX 910 581 3811

R.V. Weatherford Co.
3240 Hillview Avenue
Stanford Industrial Park
Palo Alto, CA 94304
TEL 415 493 5373

R.V. Weatherford Co.
3311 W. Earll Drive
Phoenix, AZ 85017
TEL 602 272 7144
TWX 910 951 0636

Sterling Electronics
5608 6th Avenue South
Seattle, WA 98108
TEL 206 762 9100
TLX 32-9652

Western Microtechnology
977 Benicia Avenue
Sunnyvale, CA 94086
TEL 408 737 1660

CANADA

Future Electronics
5647 Ferrier Street
Montreal, Quebec,
CANADA H4P 2K5
TEL 514 735 5775
TWX 610 421 3251

ZILOG SALES OFFICES

EASTERN REGION

Zilog, Inc.
76 Treble Cove Road
No. Billerica, MA 01862
TEL 617 667 2179
TWX 710 347 6660

MIDATLANTIC REGION

Zilog, Inc.
P.O. Box 92
Bergenfield, NJ 07625
TEL 201 385 9158
TWX 710 991 9771

MIDWESTERN REGION

Zilog, Inc.
1701 Woodfield Place
Suite 417
Schaumburg, IL 60195
TEL 312 885 8080
TWX 910 291 1064

SOUTHWESTERN REGION

Zilog, Inc.
17982 Sky Park Circle
Suite C
Irvine, CA 92714
TEL 714 549 2891
TWX 910 595 2803

EUROPEAN HDQTS

Zilog (UK) Ltd.
Nicholson House
Maidenhead, Berkshire
England
TEL (0628) 36131/2/3
TWX 848 609

10460 Bubb Road, Cupertino, California 95014 Zilog Telephone: (408) 446-4666 TWX: 910-388-7621

03-0027-02

Printed in U.S.A.